



KYT-6000 SERIES

Motor Driven Magnetic & IC Card Reader/Writer Terminal



- ISO all 3 tracks with single pass
- High speed read & write 350 mm/sec
- Encoding High Coercivity or Low Coercivity card
- RF read option
- IC Card read Option
- Compact design
- RS-232C, USB, Interface
- Ethernet Interface Option
- LCD Option **Ordering Information KYT-6ABC**

| A :: MS/IC | B :: Track | C :: Option |
|-----------------------------|----------------------|-----------------------------------|
| 1 : IC only | 1 : ISO-1 | 0 : - |
| 2 : MS-Read only | 2 : ISO-2 | 1 : LoCo |
| 3 : MS-R/W | 3 : ISO-3 | 2 : HiCo |
| 4 : MS(Read only)+IC | 5 : ISO-1,2 | 3 : LoCo & Shutter |
| 5 : MS(R/W)+IC | 6 : ISO-1,3 | 4 : HiCo & Shutter |
| 9 : Custom | 7 : ISO-2,3 | 8pin |
| | 9 : ISO-1,2,3 | Call for other Options not listed |

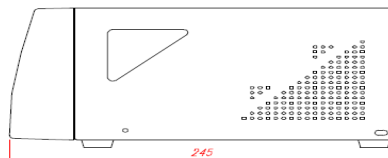

| | |
|-------------------------------|---|
| Power Requirements | Input voltage : AC 120/220V ((+-) 5%) |
| Power Consumption | |
| Motor Starting or Reversing : | Less than 250 mA |
| Card Feed & Reading : | Less than 280 mA |
| Card Feed & Writing : | Less than 450 mA |
| Steady state : | Less than 80 mA |
| Life of Head | 500,000 passes |
| Error Rate | 3/1000 cycle. |
| Communication | RS232, USB, Ethernet (options) |
| Formats read | ISO 7810, 7811/1-6, AAMVA, JIS II & custom data |